


CAF-2010

6th Gen Intel® Core™ Processor. Support up to 6 GbE Ports. Fanless Design.

Desktop Network Appliance based on 6th generation Intel® Core™ processor (codename Skylake-U)

x86-DT Architecture

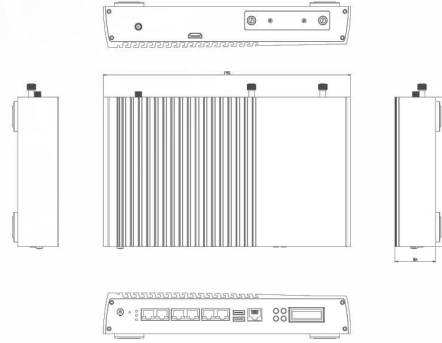

Features

- 6th generation Intel® Core™ processor, mobile SKUs
- Fanless design improves long MTBF and low noise
- Support DDR4 SO-DIMM

SPECIFICATION

CPU	6 th generation Intel® Core™ processor, mobile SKUs
PCH/Chipset	N/A
System Memory	1 DDR4 SO-DIMM, up to 16GB
Ethernet Port	6 GbE RJ45
Bypass	1 Segment
Expansion	Mini PCIe (SATA & USB Signal)
Storage Device	CF Socket One Swappable SATA SSD
Dimension	291(W) x 175(D) x 44(H)mm 11.5"(W) x 6.9"(D) x 1.73"(H)

FRONT PANEL

Serial Port	Front-access RJ45 system console
LCD Panel	2x16 Characters
LED	Power/Bypass/HDD/Ethernet
USB	Dual USB 3.0
HDMI	HDMI
LOM	N/A
Power	60W Adapter

OPERATION

Operating Environment	Temp: 0 to 40°C (32 to 104°F) 20 to 90%RH
Storage Environment	Temp: -10 to 70°C (14 to 158°F) 5 to 95%RH @ 55°C
Certification	CE/FCC/UL
OS Support	Linux Kernel

Optional CPUs

Model	Cores/Threads	Frequency	Cache	TDP
i7-6600U	2 Cores	2.6GHz	4M	15W
i5-6300U	2 Cores	2.4GHz	3M	15W
i3-6100U	2 Cores	2.3GHz	3M	15W
Celeron 3955U	2 Cores	2.0GHz	2M	15W