


## Feature

- Stylish and compact design to fit mission critical application
- VGA, DVI, dual independent display support, enable E-Map and monitor function at the same time
- Support SD flash board to enhance system security
- Remote control support

## SPECIFICATION

| Platform              |   |
|-----------------------|---|
| CPU                   | Intel® socket 478 Pentium® 4 or Celeron® processor                    |
| Chipset               | Intel® 852GME   |
| Memory                | Up to 2GB DDR2 266/200 SDRAM on two 184-pin DIMM sockets, ECC support |
| BIOS                  | Award   |
| SSD                   | N/A   |
| Storage Device        | 1 Swappable HDD   |
| Expansion             | 2 PCI slot  |
| RAID Function         | N/A   |
| Operating Temperature | 0 to 40°C   |
| Color                 | Silver  |
| Dimension             | 440 (W) x 250 (D) x 72 (H)mm  |
| Optional              | SD flash board; RS-485 board; Remote Control                          |
| I/O                   |   |
| MIO                   | RS-232 x2 and optional RS-485   |
| Ethernet              | 10BASE-T/100BASE-TX   |
| Audio                 | AC '97 2.2  |
| Keyboard/Mouse        | PS/2  |
| GPIO                  | 4GP In, 2GP Out (Optional)  |
| USB                   | USB2.0 x2   |

## ■ PVS-1125 Drawing

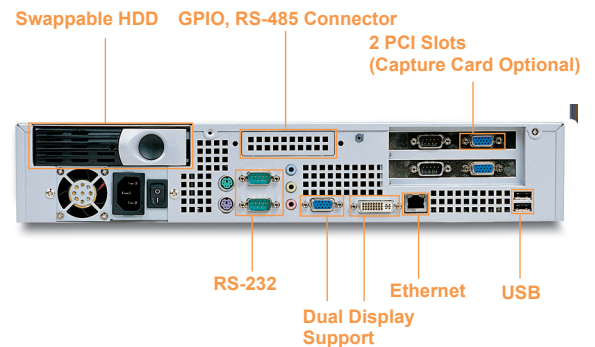

| Display        |                                     |
|----------------|-------------------------------------|
| Chipset        | Intel® 850GME GMCH                  |
| Display Memory | Up to 64MB shared DDR memory (DVMT) |
| Interface      | VGA, DVI, dual display support      |