


# ACTI-1500

## 1U Server with Hot-swappable, H/W Based Mirroring RAID

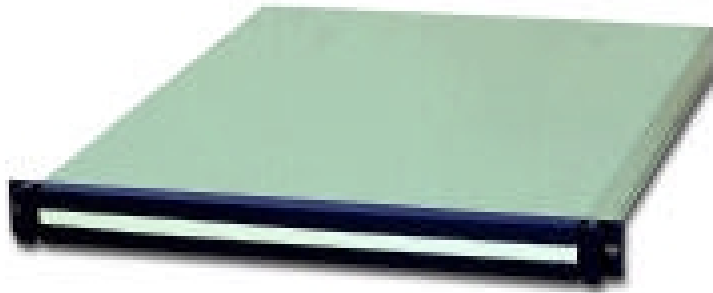

### ⦿ Specifications

#### ◆ CPU

Support single and dual Intel® FC-PGA Pentium III or Celeron™ peocessor

#### ◆ LAN

Support single & dual 10/100 Mbps LAN ports

#### ◆ Memory

Support two and four DIMMs SDRAM up to 2GB, depends on mother board used

#### ◆ Power Supply

250W ATX power supply

#### ◆ Cooling Fan

One 10cm blower with two 4cm ball-bearing fans

#### ◆ RAID Levels

0, 1, 3, 5, 0+1

#### ◆ Drive Bay

Two IDE Hot-swap mobile racks and one removable slim-type CD-ROM/FDD module

#### ◆ Data Transfer Rate

Disk interface Ultra DMA 66

#### ◆ Operating Temperature Range

5 to 40°C, 20-90%RH

#### ◆ Storage Temperature Range

0 to 70°C, 5-95%RH

#### ◆ Dimension

483(W) x 580(L) x 44.5(H) mm  
19"(W) x 22.8"(L) x 1.75"(H)

#### ◆ Weight

Gross: 11kg /24.2lb (without HDD)  
Net: 8.5kg /18.7lb (without HDD)

#### ◆ Color: Zinc-plated

### ⦿ Features

- ◆ A total of 42 sets of ACTI-1500 installed in a 42U cabinet for colocation
- ◆ Cost effective IDE RAID level 1 solution
- ◆ Built-in OS independent Hardware-based IDE mirror RAID controller
- ◆ Automatic on-line rebuilding to secure the precious data
- ◆ Hot-swappable mobile racks for easy maintenance HDD
- ◆ Audible alarm for drive failure warning
- ◆ Support Hardware management (voltage; CPU thermal; fan)
- ◆ Support various mother board